

SHRINEVA · COMMERCIAL & MIXED-USE · PARKING + 3

Parking level — *floor plan*

OPEN GROUND LEVEL · NORTH-FACING PLOT · 24 M ROAD

SHEET
SH-01
ISSUED 15 OCT 2026

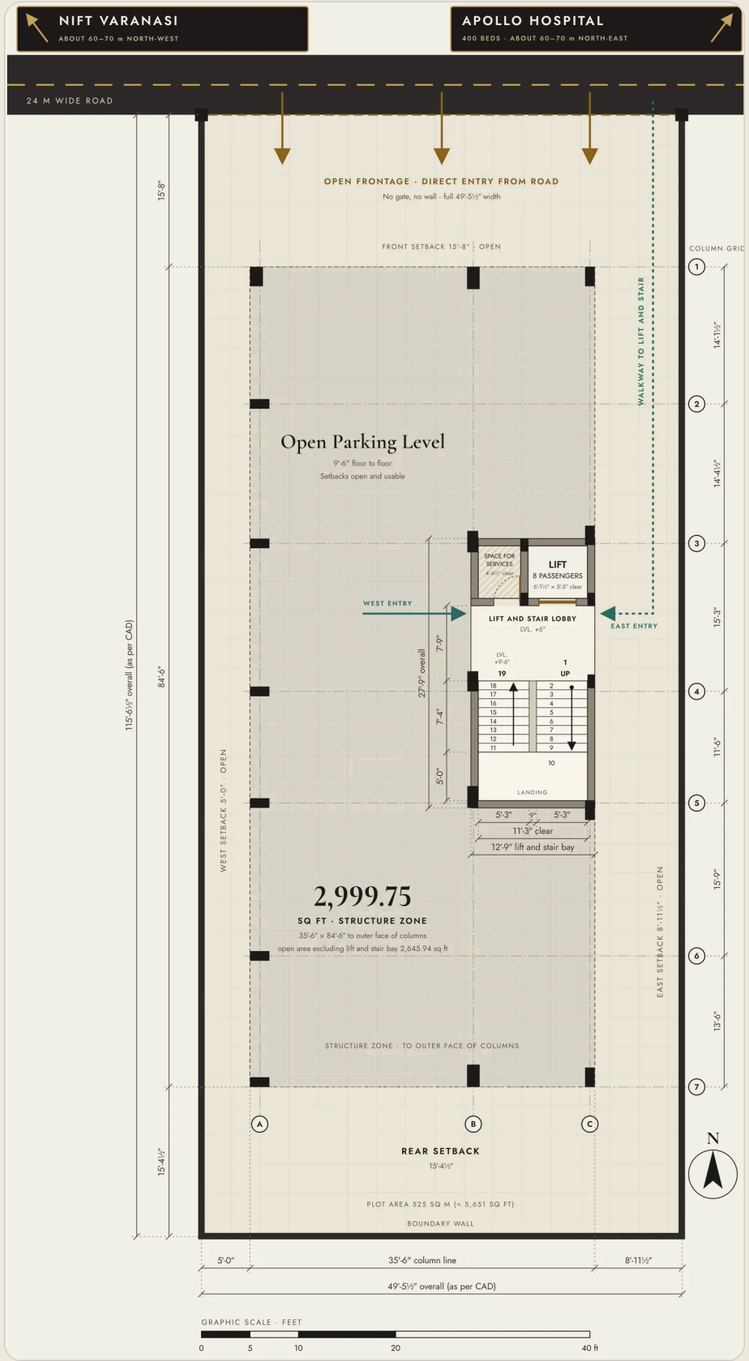

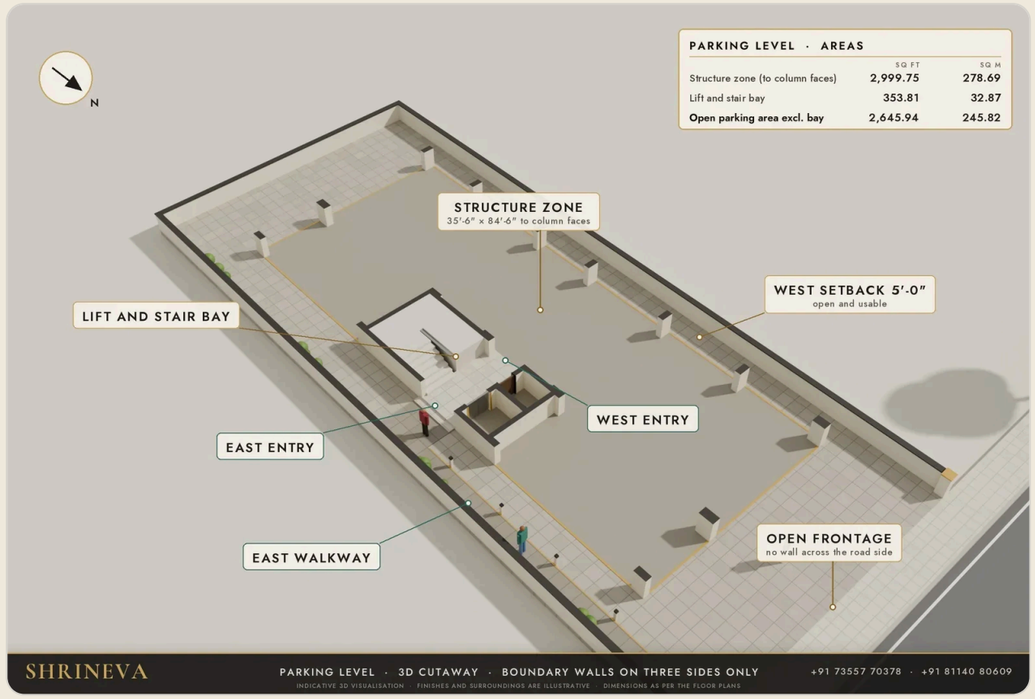

STRUCTURE ZONE

2,999.75

SQ FT · 278.69 SQ M

FLOOR TO FLOOR
9′-6″

FRONTAGE
About 50 ft, open to the road

ENTRIES
West and east to the lift and stair lobby

LIFT
8 passengers

STAIRCASE
5′-3″ flights · 19 risers

Area statement

ITEM	SQ FT	SQ M
Structure zone, to the outer face of columns (35′-6″ × 84′-6″)	2,999.75	278.69
Lift and stair bay (12′-9″ × 27′-9″)	353.81	32.87
Open parking area, excluding the bay	**2,645.94**	**245.82**

Plot 525 sq m (about 5,651 sq ft), north-facing on a 24 m road. The ground level is open to the road at the front, with boundary walls on the west, east and south.

Reading the plan

- Structure zone
- Columns and structural walls
- Lift and stair lobby
- Column grid A–C, 1–7


North is up. The road is at the top of the plan. Nearby NIFT and Apollo are shown on the plan for orientation only.


Dimensions follow the architect's CAD plan dated 27.04.26 and the owner's brief. Areas are computed from the dimensions shown and are not certified; certified areas will be issued by the architect. 3D views are indicative and subject to change for the better. Not for construction. Nothing here is an offer.

SHRINEVA · D-15, Bada Lalpur, Chandmari, near Apollo Hospital & NIFT, Varanasi, Uttar Pradesh 221003
+91 73557 70378 · +91 81140 80609 · neerajsingh250@gmail.com

Floors 1, 2 & 3 — *typical floor plan*

ONE OPEN FLOOR PLATE, REPEATED ON EVERY FLOOR · GLASS FRONT ON THE ROAD

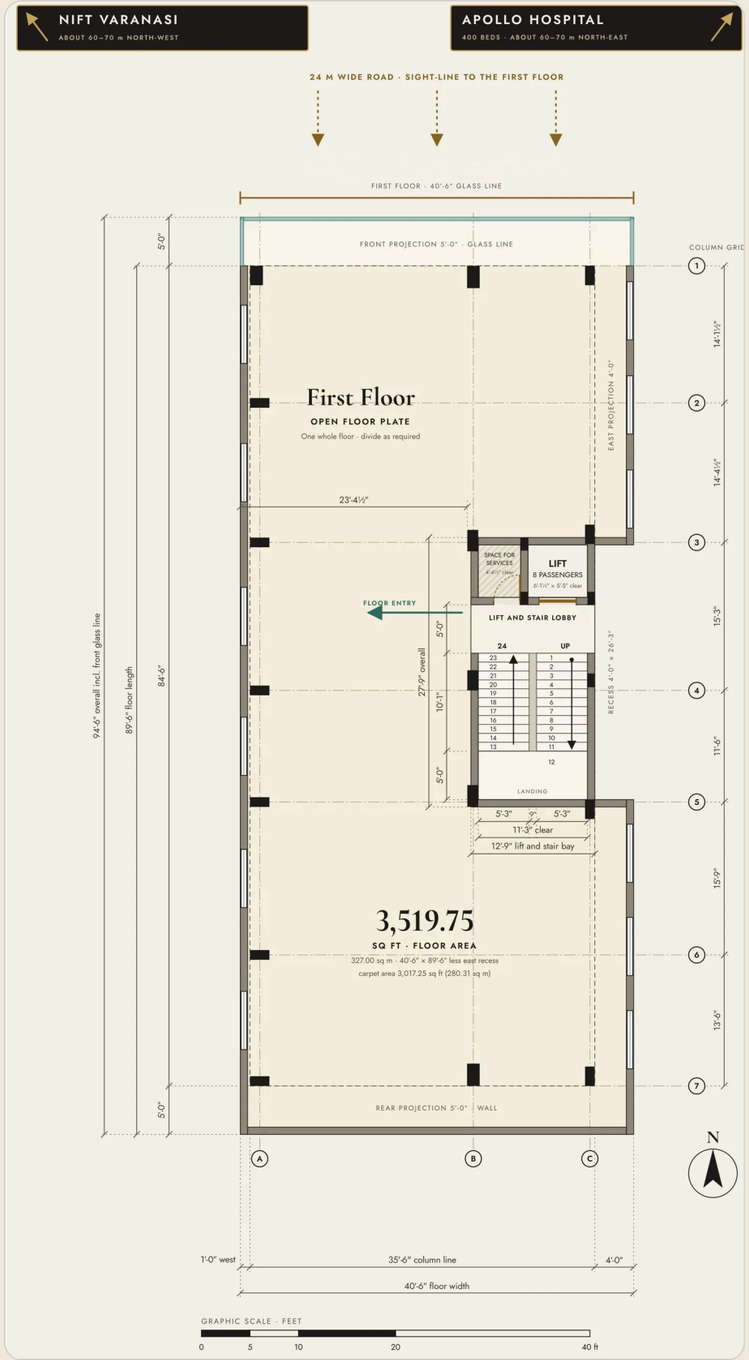

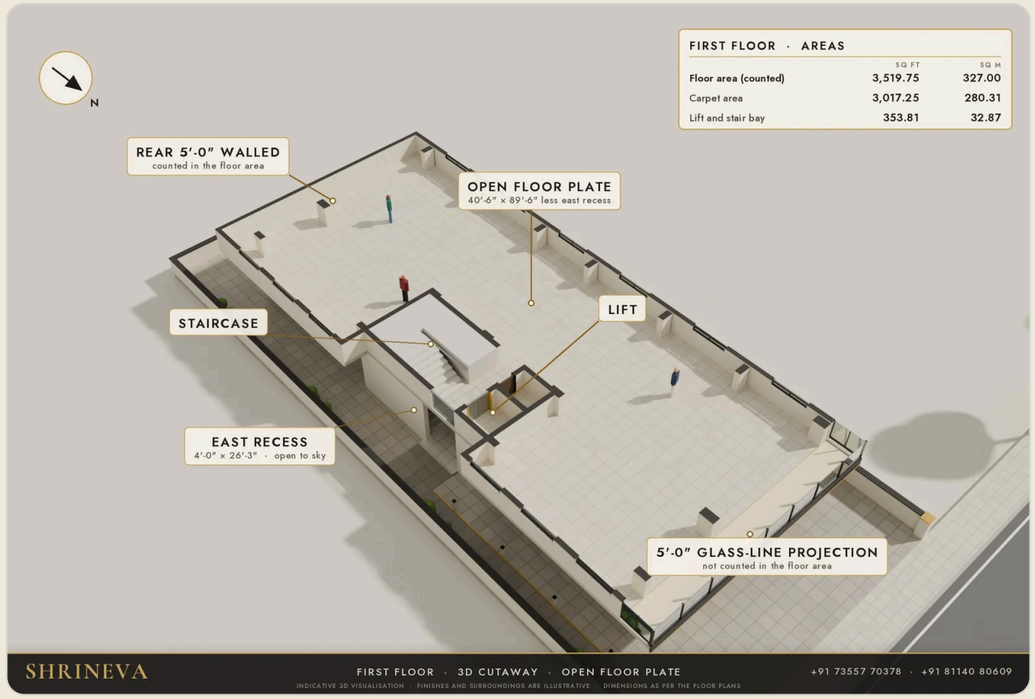

FLOOR AREA

3,519.75

SQ FT · 327.00 SQ M

FLOOR TO FLOOR
11′-6″ (3.51 m)

FRONT
40′-6″ glass line on the road

DAYLIGHT
Glass front, windows east and west

LIFT
8 passengers

STAIRCASE
5′-3″ flights · 24 risers

Area statement

ITEM	SQ FT	SQ M
Floor area, 40′-6″ × 89′-6″ less the east recess	3,519.75	327.00
Lift and stair bay (12′-9″ × 27′-9″)	− 353.81	− 32.87
External walls, 9″	− 148.69	− 13.81
Carpet area (85.7% of floor area)	**3,017.25**	**280.31**

Handover condition, clear ceiling height, toilets and pantry are to be confirmed and agreed with each occupier. Floor-wise modifications can be considered.

Reading the plan

- Open floor plate
- Columns and structural walls
- Glass line and windows
- Column grid A–C, 1–7


Floors 1, 2 and 3 share this plan. The east recess is 4′-0″ × 26′-3″. Divide the floor as required.

Dimensions follow the architect's CAD plan dated 27.04.26 and the owner's brief. Areas are computed from the dimensions shown and are not certified; certified areas will be issued by the architect. 3D views are indicative and subject to change for the better. Not for construction. Nothing here is an offer.

SHRINEVA · D-15, Bada Lalpur, Chandmari, near Apollo Hospital & NIFT, Varanasi, Uttar Pradesh 221003
+91 73557 70378 · +91 81140 80609 · neerajsingh250@gmail.com

Building summary — *parking level and floors*

TOP VIEW · AREAS · BUILDING DATA

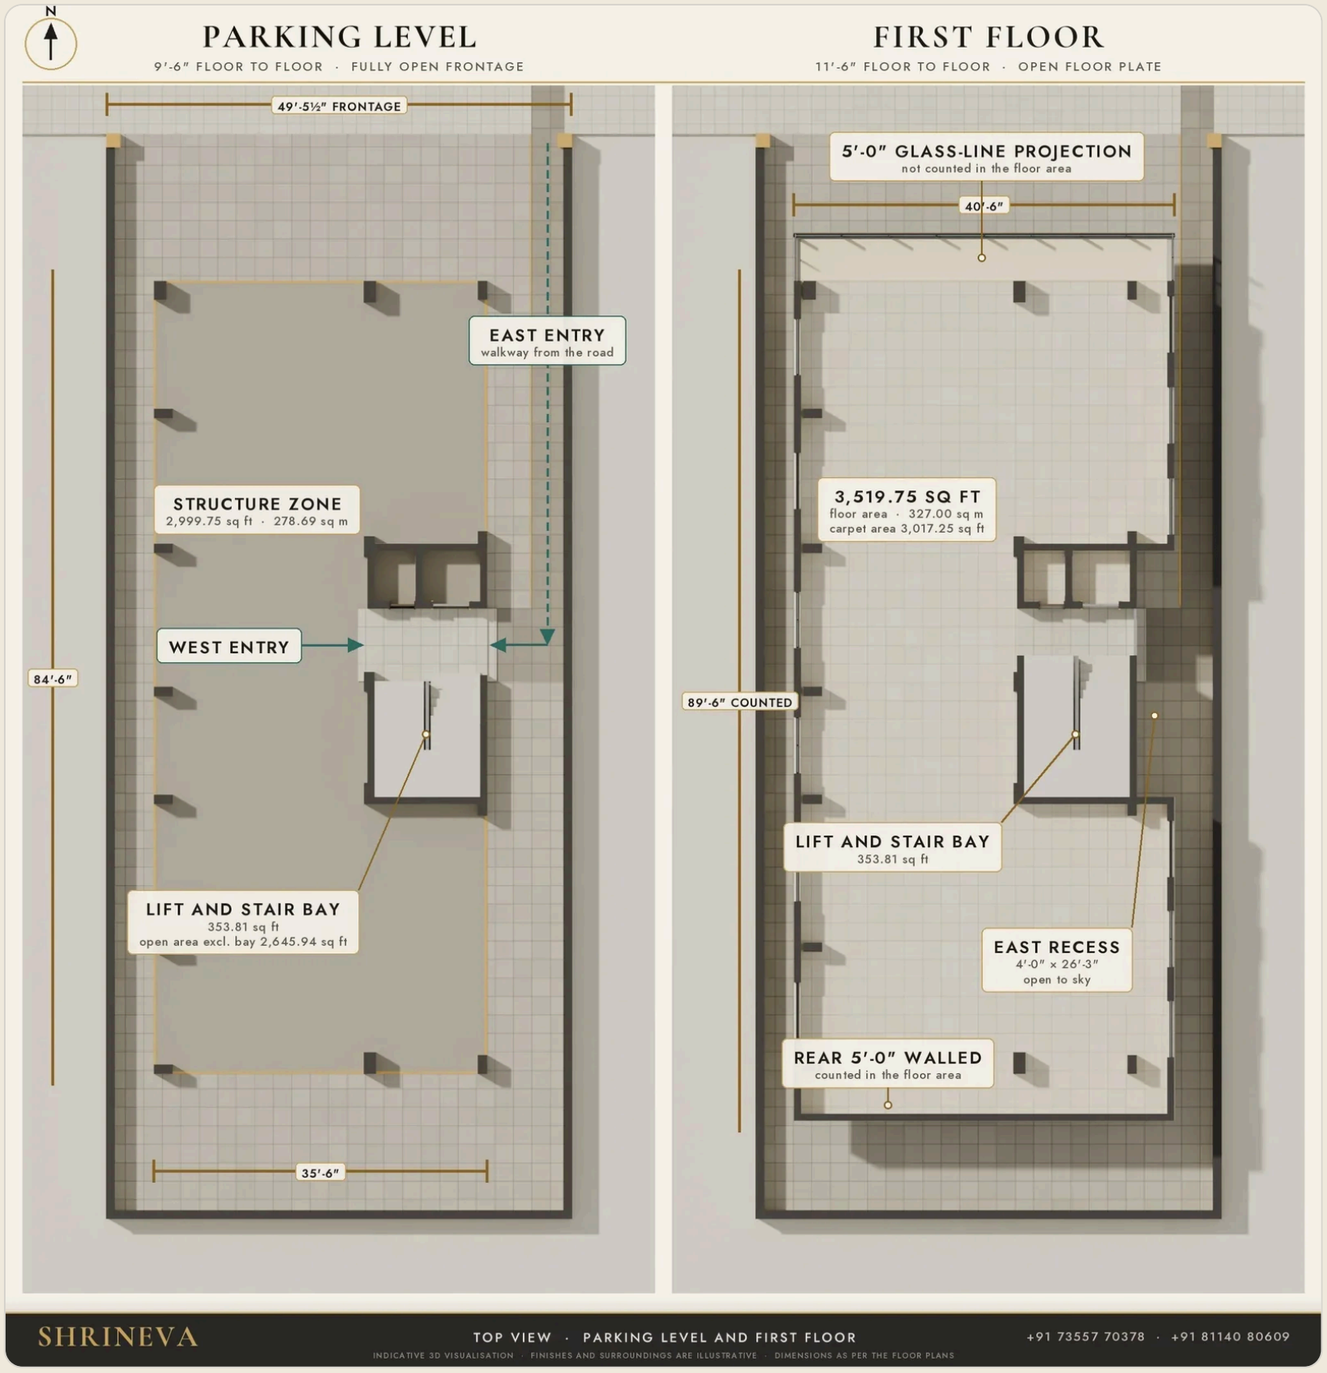

Area schedule

LEVEL	FLOOR TO FLOOR	FLOOR AREA, SQ FT	CARPET, SQ FT
Parking level	9′-6″	2,999.75 (structure zone)	—
Floor 1	11′-6″	3,519.75	3,017.25
Floor 2	11′-6″	3,519.75	3,017.25
Floor 3	11′-6″	3,519.75	3,017.25
Floors 1–3 together		**10,559.25**	**9,051.75**

Areas are computed from the architect's dimensions. Leasable area is not yet defined; it depends on the measurement basis agreed in the lease and will be confirmed with the certified areas.

Building data

Plot	525 sq m (about 5,651 sq ft)	Levels	Parking + 3 floors
Facing	North, on a 24 m road	Lift	8 passengers
Frontage	About 50 ft	Status	Under construction
Open on	All four sides	Planned handover	March 2027

Arrange a visit

+91 73557 70378 · +91 81140 80609
neerajsingh250@gmail.com
D-15, Bada Lalpur, Chandmari, near Apollo Hospital & NIFT, Varanasi, Uttar Pradesh 221003

Scan to open the exact plot in Google Maps.

Dimensions follow the architect's CAD plan dated 27.04.26 and the owner's brief. Areas are computed from the dimensions shown and are not certified; certified areas will be issued by the architect. 3D views are indicative and subject to change for the better. Not for construction. Nothing here is an offer.